


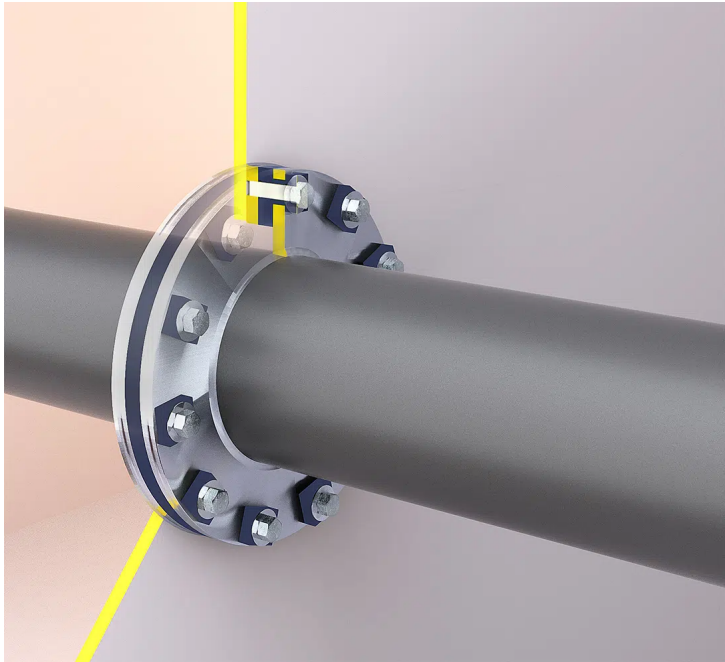

Bulkhead Penetration VT-BHP

Vibratec provides a series of watertight bulkhead penetrations. They are delivered as complete sets, with no need for drilling or burning through plates. All you need to do is to burn a hole in the bulkhead, lead the pipes through and fix by welding. When leading exhaust pipes through bulkheads, direct contact must be avoided, to prevent transfer of heat and vibrations (noise) to the construction. This can be safely done by applying bulkhead penetrations of type BHP. These pipe lead-troughs can be applied to stationary situations, like buildings, as well. Our flexible deck and bulkhead penetrations permit free extension of pipes and limit noise transfer to minimum values. By applying lagging temperature transfer to the construction is minimized as well.



Product Characteristics

Installation

Mounting bulkhead penetrations is extremely simple, all you have to do is burn a hole in the bulkhead according to the sizes on the below chart.

Remove the gasket, insulation ring and rubber rings before welding!

Technical Specifications

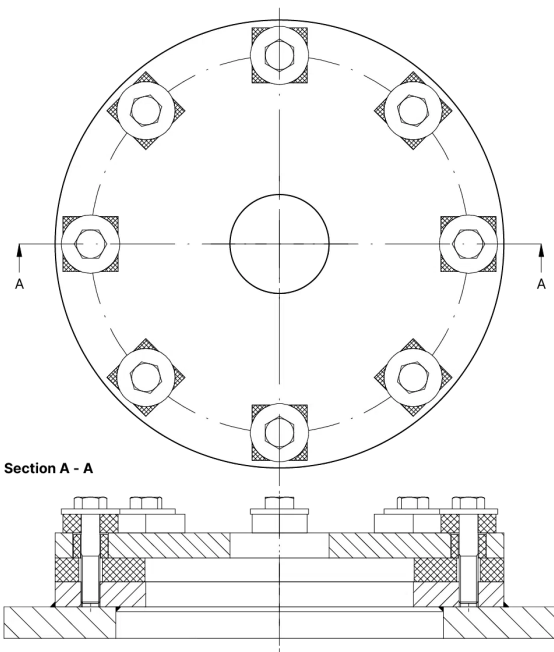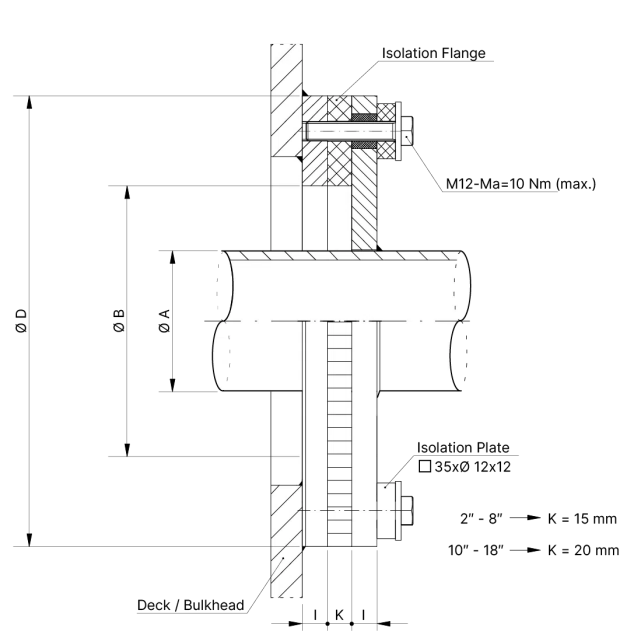

Dimensions

NB	øA	øB	øD	I	K	Bolts
	(mm)	(mm)	(mm)	(mm)	(mm)	
050	60.3	171	285	16	15	M12 × 55 (8x)
065	76.1	171	285	16	15	M12 × 55 (8x)
080	88.9	171	285	16	15	M12 × 55 (8x)
100	114.3	171	285	16	15	M12 × 55 (8x)
125	139.7	196	315	16	15	M12 × 55 (8x)
150	168.3	222	340	16	15	M12 × 55 (8x)
200	219.1	276	395	16	20	M12 × 55 (12x)
250	273.0	327	440	16	20	M12 × 60 (12x)
300	323.9	411	540	16	20	M12 × 60 (16x)
350	355.6	411	540	16	20	M12 × 60 (16x)
400	406.4	461	595	16	20	M12 × 60 (16x)
450	457.2	512	645	16	20	M12 × 60 (20x)
Other dimensions on request						



Contact information

Sweden	Norway	Denmark	Estonia	Finland	India
+46 176207880 info@vibratec.se	+47 33070750 info@vibratec.no	+45 49132244 info@vibratec.dk	+372 56627990 info@vibratec.ee	+35 8402589117 palvelu@3di.fi	+91 7755996308 rc@vibratec.in

 vibratec.org/linkedin

 vibratec.org/youtube

 vibratec.org/vimeo