



Ceiling Hanger VT-MSH, 5 – 30 kg

The VT-MSH is a vibration isolation hanger, designed for both top or side mounting. The spring isolator has a load range from 5-7 kg up to 20-30 kg with the stiffest spring and a natural frequency of 4-5 Hz. It can be used together with Vibratec click-on hangers and profiles for suspended ceilings, or as it is for hanging equipment such as speakers, pipes or ventilation.

Product Applications

Perfect for suspending equipment:


- Speakers
- Pipes
- Ventilation

Note

For beam structures, back mounting of the hangers could reduce the total height of the system.


Technical Specifications

Spring deflected 5 mm in drawing

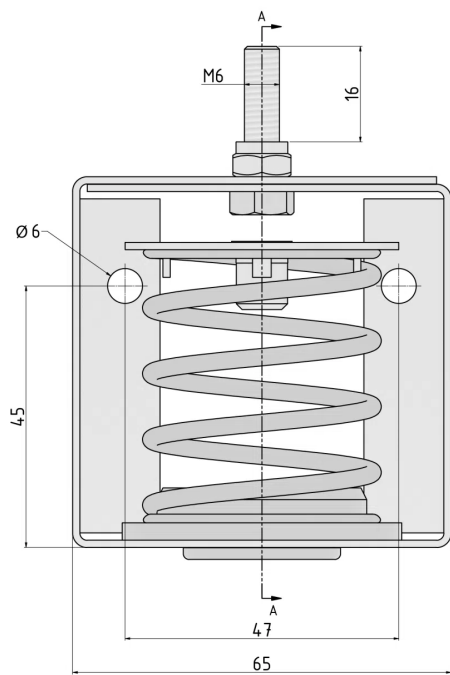

Spring deflected 5 mm in drawing

Section: A-A

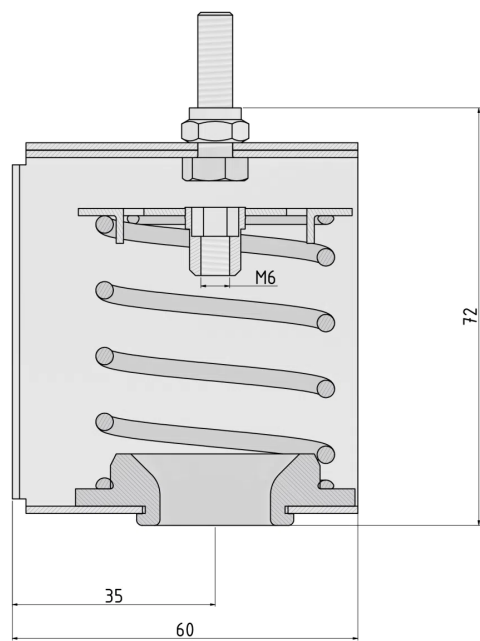



VT-MSH-technical-specification
ceiling-hanger-vt-msh-technical-specification.xlsx

Sheet1

Type	Load (kg)	Spring rate (N/mm)	F _n (Hz)
VT-MSH-S-1	5 - 7	6	4 - 5
VT-MSH-S-2	6 - 9	7.6	
VT-MSH-S-3	9 - 13	10.7	
VT-MSH-S-4	13 - 20	17.5	
VT-MSH-S-5	20 - 30	27	
VT-MSH-S-6	30 - 50	39.7	



Contact information

Sweden	Norway	Denmark	Estonia	Finland	India
+46 176207880 info@vibratec.se	+47 33070750 info@vibratec.no	+45 49132244 info@vibratec.dk	+372 56627990 info@vibratec.ee	+35 8402589117 palvelu@3di.fi	+91 7755996308 rc@vibratec.in



vibratec.org/linkedin



vibratec.org/youtube



vibratec.org/vimeo