



Ceiling Hanger VT-RFH

The Ceiling Hanger VT-RFH is a series of ceiling hangers available in 5 different load ranges. Housing and washer in zinc plated steel, elastic elements in color coded polyurethane foam. The isolation pad is available in different stiffnesses depending on load.

Product Characteristics

Deflection:

4 – 8 mm for pads 50 mm

Resonance frequency:


7 – 10 Hz for pads 50 mm

Product Applications

For elastic pendulum suspension of piping, mechanical equipment, fans, air ducts, loudspeakers and inner ceilings. The REGUFOAM vibration pad acts as a vibration isolator attenuating structure born sound.

For smaller loads use [VT-MCH](#).

Technical Specifications

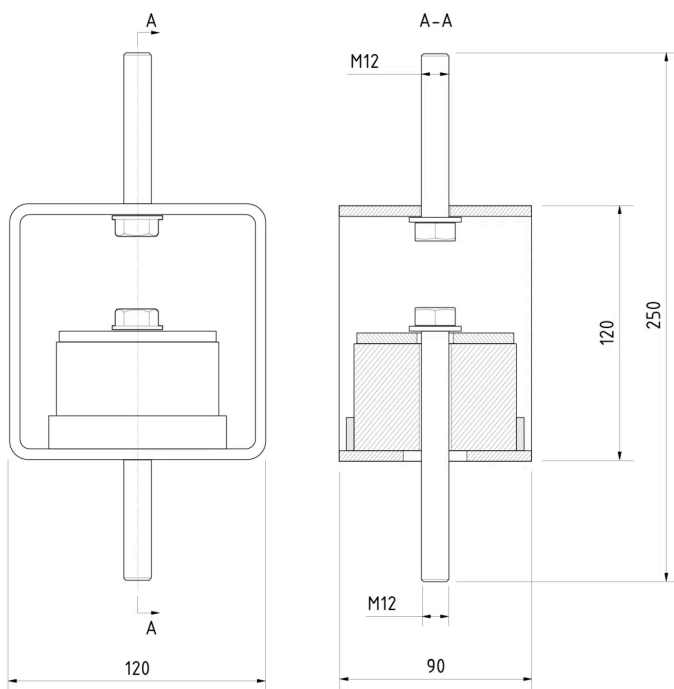

 Ceiling-Hanger-RFH-technical-specification
ceiling-hanger-rfh-technical-specification.xlsx

Load Range for Hanger

Type	Load (kg)	Color
VT-RFH-220/50	20 - 40	Purple
VT-RFH-510/50	40 - 80	Beige
VT-RFH-570/50	80 - 140	Pink
VT-RFH-740/50	140 - 200	Red
VT-RFH-810/50	180 - 250	Brown



Contact information

Sweden	Norway	Denmark	Estonia	Finland	India
+46 176207880 info@vibratec.se	+47 33070750 info@vibratec.no	+45 49132244 info@vibratec.dk	+372 56627990 info@vibratec.ee	+35 8402589117 palvelu@3di.fi	+91 7755996308 rc@vibratec.in

 vibratec.org/linkedin

 vibratec.org/youtube

 vibratec.org/vimeo