


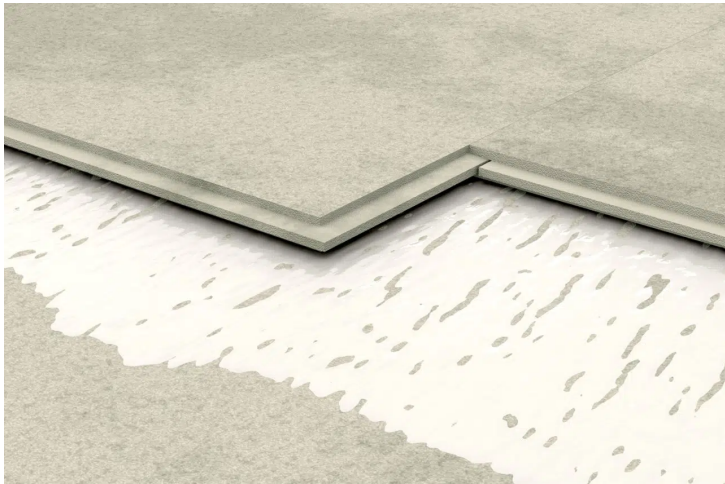

Damping Glue DG-2000

DG-2000 is a water-based acrylic damping glue optimised for wooden based constrained layer damping applications. A one-component viscoelastic damping glue for wooden and fibre based constrained layer applications.

Product Characteristics

DG-2000 is a water-based acrylic damping glue optimised for wooden based constrained layer damping applications. Stiff sheet materials used for floor and wall constructions, like plywood, chipboard and plasterboard have very low damping. These materials / constructions therefore easily generate resonant structure borne vibrations, which causes noise radiation and fatigue problems.

DG-2000 should be used in a sandwich construction, where **DG-2000** is constrained between two sheets of for example plywood. **DG-2000** is easy to apply and the loss factor of your construction will be increased and the radiated noise will be decreased.

Product Applications

- Structural damping of floors in bus and rail vehicles, stages and walls.
- Impact damping of floors, e.g. in buildings and trains.
- Increased transmission loss of walls and doors.
- Further more is the glue an excellent solution for loudspeaker constructions.

The thickness ratio between the constraining layers should be 1:3. However it is actually the stiffness ratio that is of interest. About 1 kg/m^2 **DG-2000** should be applied, preferable by a roller or toothed trowel, between two sheet of for example plywood, chipboard, or MDF. This gives a damping layer of about 1 mm thickness.

The surfaces of the two sheet materials should be joined together while the glue is still wet and held under firm contact (maximum pressure about 30 KN/m^2).

When gluing sheets on site, the top sheet may be nailed or screwed tightly to the structure layer. Ensure that there is no air cavities trapped between the two sheets. It is important to note that the bending stiffness of the damped structure is lower than a homogenous sheet with equal thickness.

It is possible to drill holes or cut the laminated sheet in the same way as a homogenous sheet.

Pre-treatment of surface: Clean the surface free from dirt and dust.

Acoustic Properties



For a single sheet construction the airborne noise transmission loss is mainly determined by the surface weight of the sheet. Below the coincidence frequency, the

transmission loss will theoretically increase by 6 dB per octave and with 6 dB per doubling of the area weight. Above the coincidence frequency the damping loss factor of the sheet is mainly driving the transmission loss. This can clearly be seen in the graph below.

The performance of **DG-2000** is like all viscoelastic damping materials heavily dependent on frequency and temperature. **DG-2000** has a high loss factor over a wide temperature and frequency range and is therefore a good choice for many applications.

Technical Specifications

Transmission loss of damped and undamped plywood

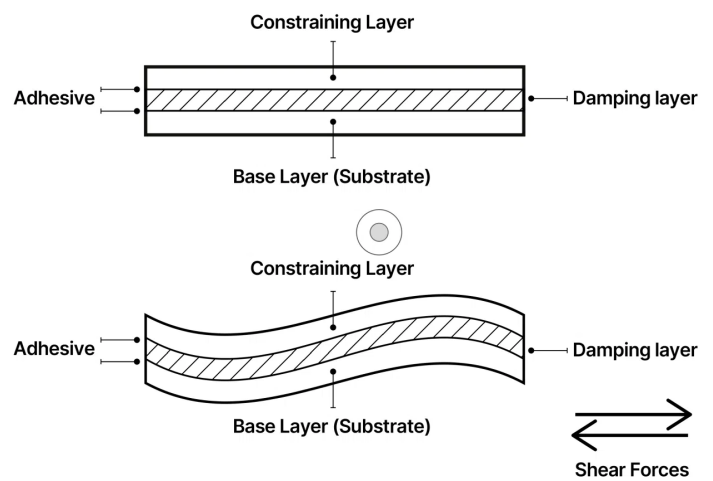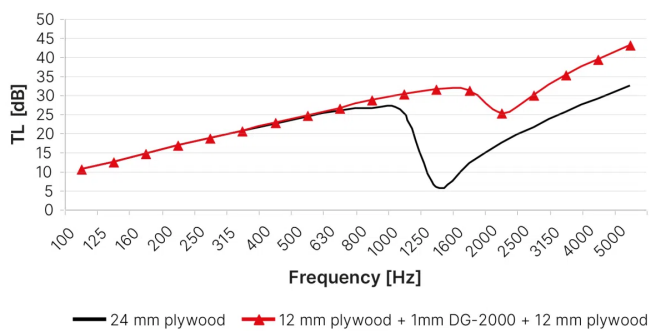



DG-2000 technical specifications

damping-glue-dg-2000-technical-specifications.xlsx

Properties

Colour	Whitish
Solvent	Water
Density (dry)	~ 1300 kg/m3
Density (wet)	~ 1050kg/m3
Flammability:	Non-flammable
Solid content	~ 80 % by weight
Drying time at 20°C	5 to 7 hours (about 35 minutes at 80°C, in a heated press.)
Storage	Can be stored at least one year in unopened containers
	(Protect from frost!)
Size	16kg

Downloads



Damping-Glue-
2000-technical-
datasheet-en



Contact information

Sweden	Norway	Denmark	Estonia	Finland	India
+46 176207880 info@vibratec.se	+47 33070750 info@vibratec.no	+45 49132244 info@vibratec.dk	+372 56627990 info@vibratec.ee	+35 8402589117 palvelu@3di.fi	+91 7755996308 rc@vibratec.in
 vibratec.org/linkedin			 vibratec.org/youtube	 vibratec.org/vimeo	