




Elastomer Mount HD Marine

Low frequency rubber (NR) vibration isolator designed for use under propulsion engines and other marine applications.


Product Characteristics

Material: Natural Rubber


Natural frequency: 8-12 Hz.

The Amplification factor: 3-4.

Max Shockload: 150 kN (All Directions)

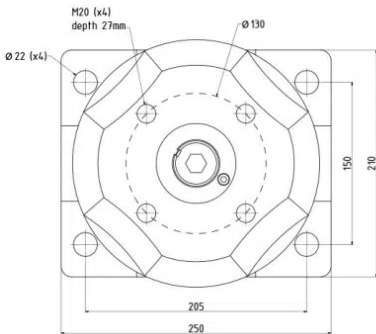

45 ShA 55 ShA 65 ShA

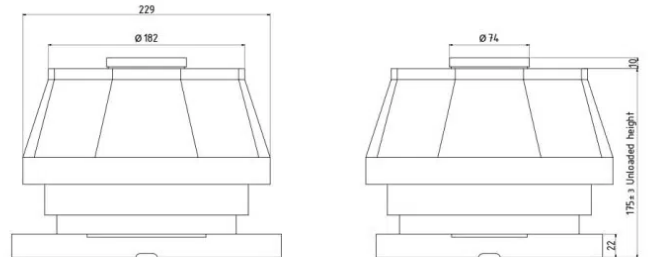

Technical specifications

Hardness	Load range in kN	
	Min	Max
45 Sh	12	30
55 Sh	17	35
65 Sh	30	65

Displacement limiter clearance

Direction	Vertical up	Vertical down	Radial
Displacement limiter clearance (mm)	4	4	3



Contact information

Sweden	Norway	Denmark	Estonia	Finland	India
+46 176207880 info@vibratec.se	+47 33070750 info@vibratec.no	+45 49132244 info@vibratec.dk	+372 56627990 info@vibratec.ee	+35 8402589117 palvelu@3di.fi	+91 7755996308 rc@vibratec.in
 vibratec.org/linkedin  vibratec.org/youtube  vibratec.org/vimeo					