



Metal Mount VT-DZ-S

An all-metal vibration isolator for a resilient suspension of motors, pumps, generators and exhaust pipes


Product Characteristics

- Housing of steel, KTL coated
- Axis, top cover and cushion seat of steel, KTL-coated
- Safety ring DIN 471, stainless steel
- Damping cushion of stainless steel wire
- High static and dynamic load capacity
- Compact design
- Long lifetime
- Maintenance free

Product Applications

Resilient suspension of motors, pumps, generators and exhaust pipes

Technical Specifications

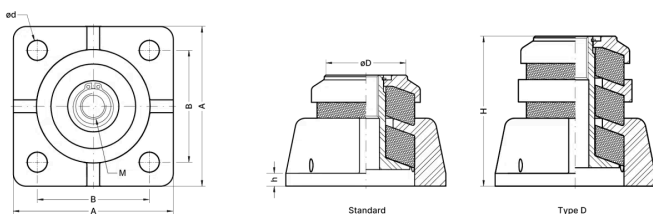



Metal-Mount-VT-DZ-S-technical-specifications

metal-mount-vt-dz-s-technical-specifications.xlsx

Specifications

Type	Dimensions (mm)							Load (daN) compression - tension		Frequency	Weight
	A	B	Ø D	Ø d	H	h	M	Static	Dynamic	(Hz)	(kg)
VT-DZ-S - 60-1	80	64	35	8.2	50	6	M12	5 - 60	200	15 - 20	0.7
VT-DZ-S - 250-1					50 - 250			500			
VT-DZ-S - D60-1					75			5 - 60	200	8 - 10	0.8
VT-DZ-S - D250-1					50 - 250			500			
VT-DZ-S - 900-1	100	70	52	12.5	70	8	M16	50 - 900	3500	15 - 20	~ 1.4
VT-DZ-S - D900-1					94					11 - 15	~ 1.7
VT-DZ - 1500-1	130	100	58	84	10	250 - 1500		15 - 20		~ 3.1	
VT-DZ-S-D1500-1				109				11 - 15		~ 3.7	

VIBRATEC

Contact information

Sweden

+46 176207880
info@vibratec.se

Norway

+47 33070750
info@vibratec.no

Denmark

+45 49132244
info@vibratec.dk

Estonia

+372 56627990
info@vibratec.ee

Finland

+35 8402589117
palvelu@3di.fi

India

+91 7755996308
rc@vibratec.in



vibratec.org/linkedin



vibratec.org/youtube



vibratec.org/vimeo