



Metal Mount VT-DZ

An all-metal vibration isolator for a resilient suspension of motors, pumps, generators and exhaust pipes.


Product Characteristics

- Housing cover and cushion seat made of cast steel, KTL coated
- Threaded spacer made of steel, KTL coated
- External retaining ring DIN 471 Metric
- Damping cushion of stainless steel wire
- High static and dynamic load bearing capacity
- High stability
- Ageing resistance

Product Applications

Resilient suspension of motors, pumps, generators, exhaust pipes

Technical Specifications

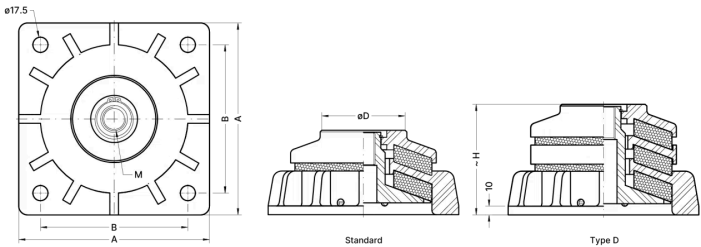

Specifications

Type	Dimensions (mm)					Load (daN) compression - tension		Frequency	Weight
	A	B	Ø D	H	M	Static	Dynamic	(Hz)	(kg)
VT-DZ - 2500-1	202	152	96	86	M20	500 - 2500	12500	15 - 20	~8.6
VT-DZ-D - 2500-1				113				11 - 15	~ 10.5
VT-DZ - 7000-1	220	170		97	M27	500 - 7000	22500	15 - 20	~ 12.6
VT-DZ-D - 7000-1				127				11 - 15	~ 13.7



Contact information

Sweden	Norway	Denmark	Estonia	Finland	India
+46 176207880 info@vibratec.se	+47 33070750 info@vibratec.no	+45 49132244 info@vibratec.dk	+372 56627990 info@vibratec.ee	+35 8402589117 palvelu@3di.fi	+91 7755996308 rc@vibratec.in

 vibratec.org/linkedin

 vibratec.org/youtube

 vibratec.org/vimeo