



Metal Mount VT3353 – VT3355

Double acting all metal resilient isolator produced of AISI 316 stainless. The progressive spring rate of the cushions yields an almost constant natural frequency over a wide load range. The elements are non creeping, has excellent resistance to oils, solvents, water, chemical agents and to extremes of temperature.

Product Characteristics

Material: stainless steel AISI316.
Natural frequency: 15-20 Hz.
Maximum excitation amplitude: 0.3 mm.
Amplification factor: <4.
Dynamic overload: 5 g
Temperature range: -90 °C to +300 °C.

If required, it is possible to have the cushions produced in higher quality stainless steel or in other special metals.

Note

Radial loads are accepted up to 100 daN. Over that limit the centre pin short-circuit the isolator and acts as a mechanical stop.

Product Applications



Vibration isolation for all kind of heavy units, gas turbines, offshore accommodation modules etc. Protection from high dynamic forces (impacts) of punching machines, power presses, etc.

Very useful as "snubber" for suspended marine equipment such as auxiliary engines.

Notes

The cushions can be ordered separately, see data sheets for VT 1502-1506.

Technical Specifications

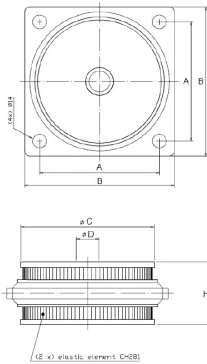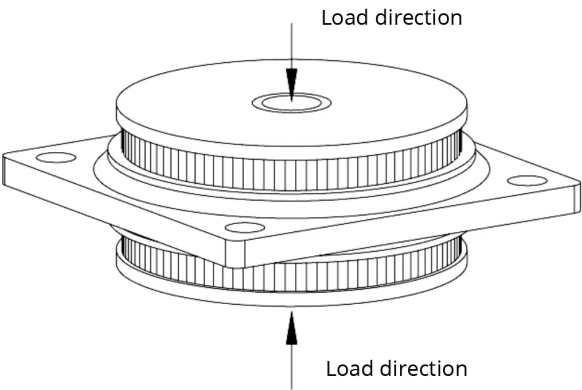

Ref.	Load range in daN (= kg)
VT 3353	± 100 - 1500
VT 3355	± 500 - 3000

Ref.	A	B	C	D	H
VT 3353	84	110	76	For M16	66
VT 3355	120	150	124	For M20	72

Dimensions (metric)

Ref.	A	B	C	D	H
VT 3353	84	110	76	For M16	66
VT 3355	120	150	124	For M20	72

Load range

Ref.	Load range in daN (kg)
VT 3353	± 100 - 1500
VT 3355	± 500 - 3000



Contact information

Sweden	Norway	Denmark	Estonia	Finland	India
+46 176207880 info@vibratec.se	+47 33070750 info@vibratec.no	+45 49132244 info@vibratec.dk	+372 56627990 info@vibratec.ee	+35 8402589117 palvelu@3di.fi	+91 7755996308 rc@vibratec.in
vibratec.org/linkedin vibratec.org/youtube vibratec.org/vimeo					