



Spring Hanger VT-4523

All-metal hanger with spring made of high tensile steel. For isolation of pipes, fans and cooling units. Scroll in aluminum and housing in zinc plated steel.

Product Characteristics


Mounts with low natural frequency, 5-6 Hz, depending on preload.

- Accepts both static and dynamic tension forces.
- Maximum excitation: ± 1 mm.
- Mechanical strength: 2 g.
- Amplification factor: < 5 .
- Temperature range: -90°C to $+300^{\circ}\text{C}$

Product Applications

- Isolation of exhaust-, air- water- and steam-pipes.
- Isolation of fans, ventilation and cooling aggregates.
- Stabilization of frames and equipment on vessels, ships and vehicles.

Technical Specifications

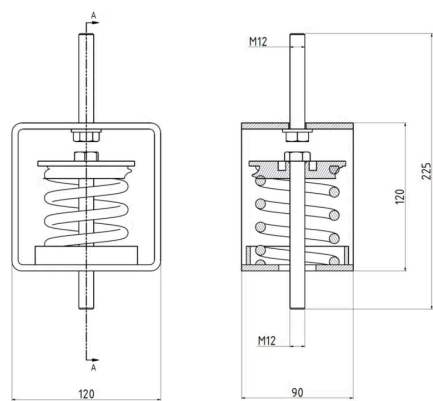



Spring-isolator-VT-4523-technical-specification

spring-isolator-vt-4523-technical-specification.xlsx

Load Range for Springs

Type	Load (daN ≈ kg)
VT-4523-01	30 -50
VT-4523-02	50 -80
VT-4523-03	80 -125
VT-4523-04	125 -195
VT-4523-05	195 -300



Contact information

Sweden	Norway	Denmark	Estonia	Finland	India
+46 176207880 info@vibratec.se	+47 33070750 info@vibratec.no	+45 49132244 info@vibratec.dk	+372 56627990 info@vibratec.ee	+35 8402589117 palvelu@3di.fi	+91 7755996308 rc@vibratec.in

 vibratec.org/linkedin

 vibratec.org/youtube

 vibratec.org/vimeo