


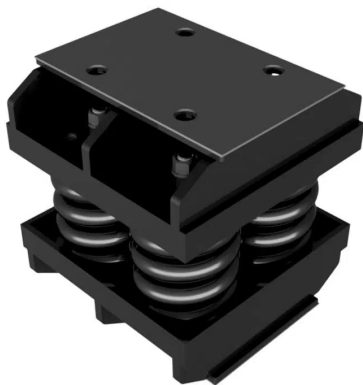


Spring Package VT4625-B


Pre-Compressed Spring Boxes primarily used for vibration isolation of heavy machine foundations and buildings. The VT4625-serie is used where the requirement for resonance frequency is approximately 3.5 Hz.

Spring package 4625-B4

Technical Specifications

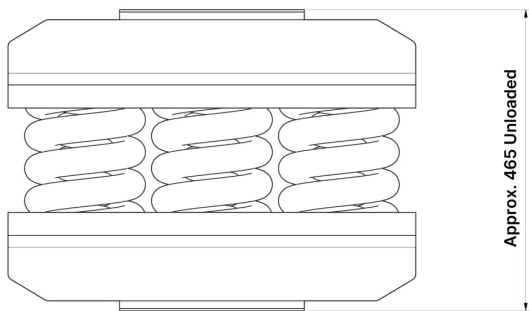

VT4625-BAXYP
VT46 = series
25 = max. deflection
BA = box type (2, 4, 6 or 9 springs)
X = number of OUTER springs
Y = number of INNER springs
P = Pre compressed

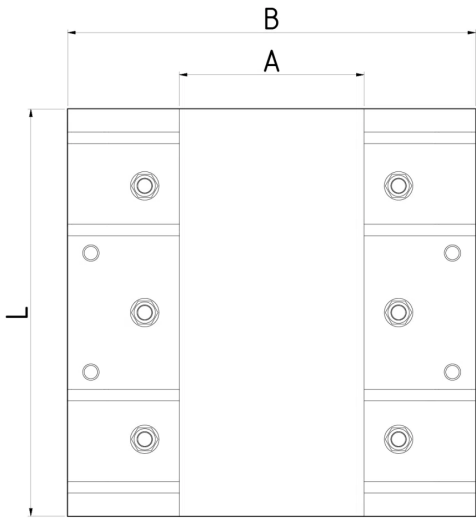



VT4625-B4 technical specifications

spring-package-vt4625-b4-technical-specifications.xlsx

Dimensions & load range

Ref.	L	B	A	Load Range
	(mm)	(mm)	(mm)	(kN)
VT4625-B2	190	360	250	120 - 212
VT4625-B4	360	360	250	200 - 420
VT4625-B6	530	360	250	325 - 635
VT4625-B9	530	530	250	525 - 950

Downloads



vt4625-b



Contact information

Sweden	Norway	Denmark	Estonia	Finland	India
+46 176207880 info@vibratec.se	+47 33070750 info@vibratec.no	+45 49132244 info@vibratec.dk	+372 56627990 info@vibratec.ee	+35 8402589117 palvelu@3di.fi	+91 7755996308 rc@vibratec.in
 vibratec.org/linkedin		 vibratec.org/youtube		 vibratec.org/vimeo	