




Wall Mount VT-AWS-L

VT-AWS-L (Acoustic Wall Suspension) is used to de-couple inner walls to prevent transmission of vibrations and structure born sound.

Product Characteristics

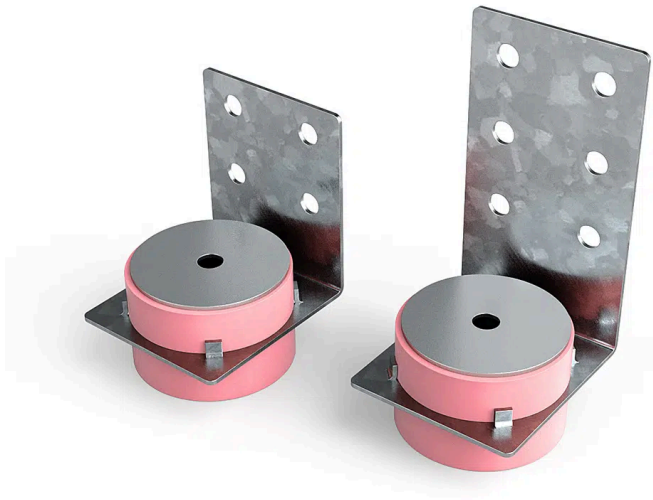

Wall mount VT-AWS-L is an EPD-certified product.

Product Applications

Perfect for decoupling walls for a better noise reduction between rooms, apartments, hallways, elevators, restaurants, training facilities, factories etc.

Installation


Use approximately 1 VT-AWS-L per 2 square metre wall.

1. Fasten the VT-AWS-L element with a screw through the centerhole, the diameter of the hole is 6 mm. Compress fixing until the cylindrical distance is in contact with existing wall.
2. Use self-tapping screws to fix into wall rail or stud.

The VT-AWS-L may also be used as ceiling hanger. The upward elastic element then needs to be replaced by a softer material.

Contact Vibratec for support.

Technical Specifications

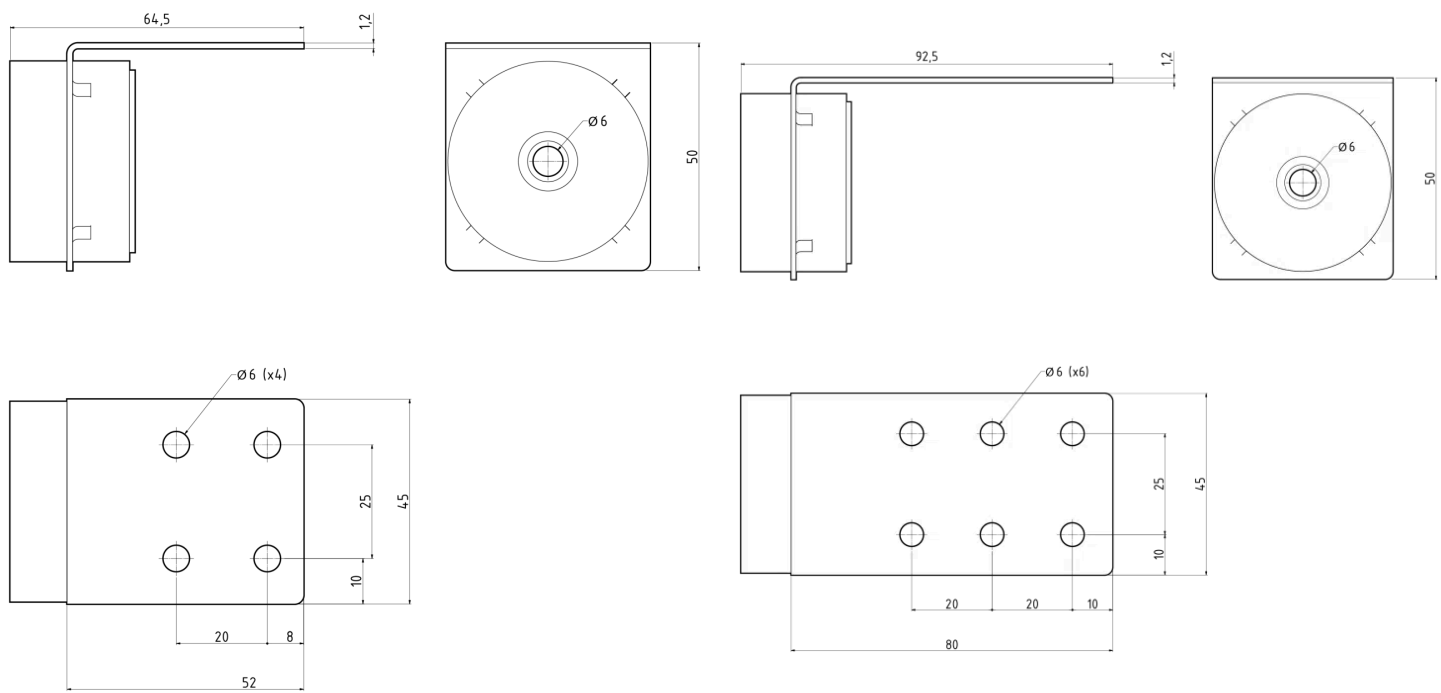

Downloads



EPD document |
EPD-IES-
0030216:001
english



Contact information

Sweden	Norway	Denmark	Estonia	Finland	India
+46 176207880 info@vibratec.se	+47 33070750 info@vibratec.no	+45 49132244 info@vibratec.dk	+372 56627990 info@vibratec.ee	+35 8402589117 palvelu@3di.fi	+91 7755996308 rc@vibratec.in
vibratec.org/linkedin vibratec.org/youtube vibratec.org/vimeo					