




Wall Mount VT-AWS

VT-AWS (Acoustic Wall Suspension) is used to decouple inner walls to prevent transmission of vibrations and structure born sound.

Product Characteristics

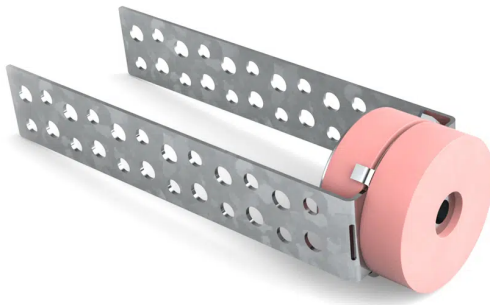

Wall mount VT-AWS is an EPD-certified product.

Product Applications

Perfect for decoupling walls for a better noise reduction between rooms, apartments, hallways, elevators, restaurants, training facilities, factories etc. See our video on how the system is designed:



Vibratec AWS Wall System

Vibratec Akustikprodukter

00:35

Installation


Use approximately 1 VT-AWS per 2 square meter wall.

1. Fasten the VT-AWS element with a screw through the center-hole, the diameter of the hole is 6 mm. Compress fixing until the cylindrical distance is in contact with existing wall.
2. Fold flaps at edge of rubber.
3. Use self-tapping screws to fix into wall rail or stud.
4. If needed, remove excessive flaps when screwed on the rail or stud.

The VT-AWS may also be used as ceiling hanger. The upward elastic element then needs to be replaced by a softer material.

Contact Vibrattec for support.

Technical Specifications

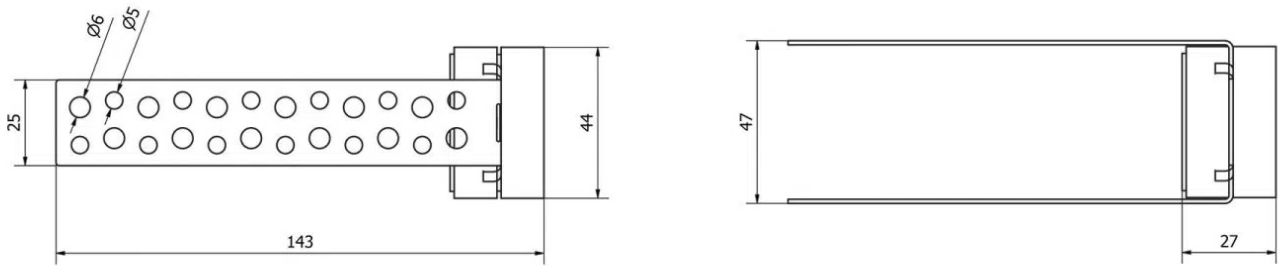

Downloads



EPD document |
EPD-IES-
0030216:001
english



Contact information

Sweden	Norway	Denmark	Estonia	Finland	India
+46 176207880 info@vibrattec.se	+47 33070750 info@vibrattec.no	+45 49132244 info@vibrattec.dk	+372 56627990 info@vibrattec.ee	+35 8402589117 palvelu@3di.fi	+91 7755996308 rc@vibrattec.in
 vibrattec.org/linkedin			 vibrattec.org/youtube		 vibrattec.org/vimeo