

# Wall Mount VT-WH

Wall mount VT-WH (Wall Hanger) is used to de-couple inner walls to prevent transmission of vibrations and structure born sound.

## Product Characteristics

Vibratecs acoustic wall suspension products are used to de-couple inner walls to prevent transmission of vibrations and structure born sound. Decoupling walls is one of the most effective methods to sound insulate a room. The idea is to separate for example the facade wall from the stud wall to create a void that will break the direct path of sound.

**Wall hanger VT-WH is an EPD-certified product.**

## Product Applications

### Installation


Use approximately 1 VT-WH per 2 square metre wall.


1. Fasten the VT-WH element with a threaded rod (Not included in the shipment), the diameter of the hole is 6 mm.
2. Use self-tapping screws to fix into wall rail or stud.

The VT-WH may also be used as ceiling hanger. The upward elastic element then need to be replaced by a softer material.

Contact Vibratec for support

## Technical Specifications

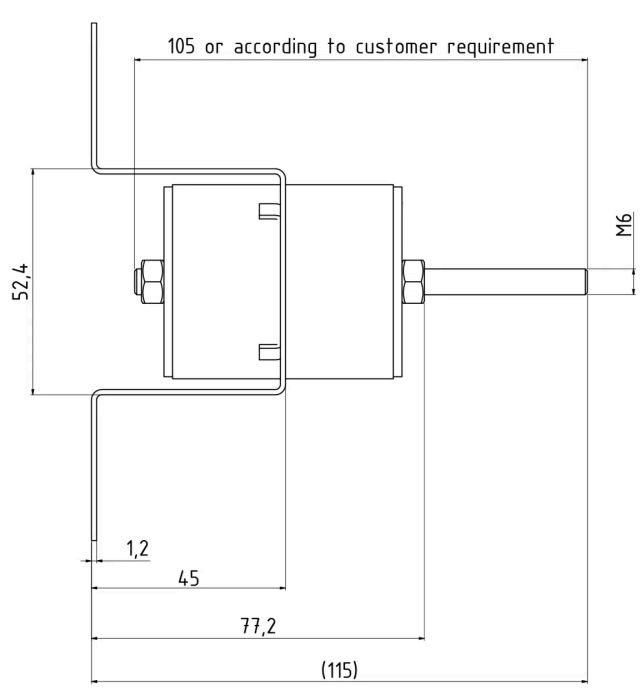

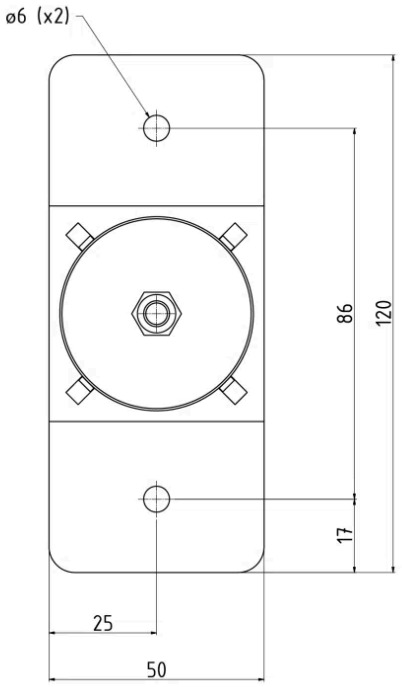
## Downloads

EPD document
EPD-IES-0030216:001
english

VIBRATEC

### Contact information


| Sweden | Norway | Denmark | Estonia | Finland | India |
|---|---|---|---|---|---|
| +46 176207880<br>info@vibratec.se | +47 33070750<br>info@vibratec.no | +45 49132244<br>info@vibratec.dk | +372 56627990<br>info@vibratec.ee | +35 8402589117<br>palvelu@3di.fi | +91 7755996308<br>rc@vibratec.in |

vibratec.org/linkedin vibratec.org/youtube vibratec.org/vimeo