


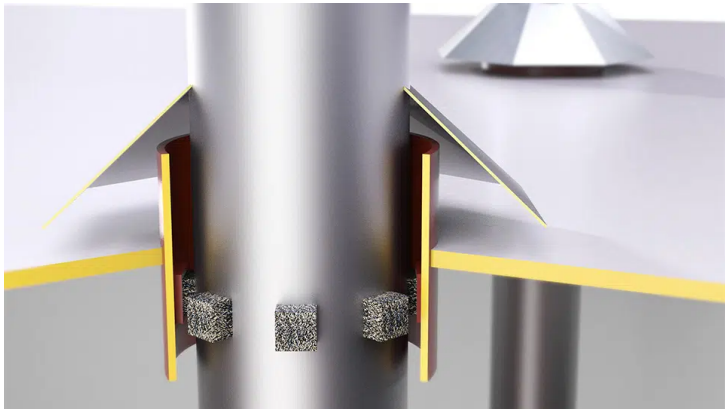

Penetration Clamp VT-FTPC

VT-FTPC is an all metal pipe clamp with resilient elements made of stainless steel 18/8. Ring and base plate made of construction steel.

Product Characteristics



Protection: primer.

It is also equipped with a rain cap, preventing rain to get inside the pipe. The rain cap is in AISI 316L.

See table for dimensions, other sizes available on request.

Delivered in two halves or four quarters depending on size and weight, and welded on site. This is to ease installation.

Technical Specifications

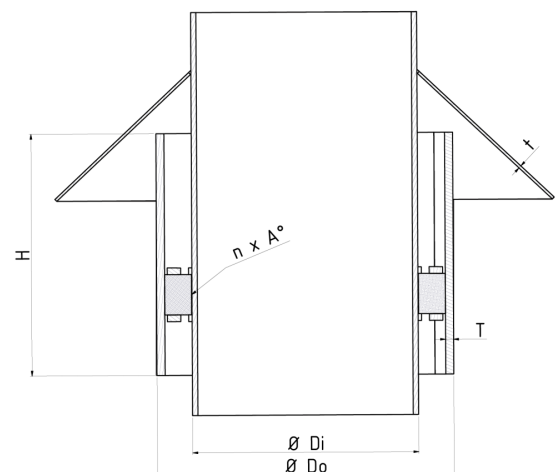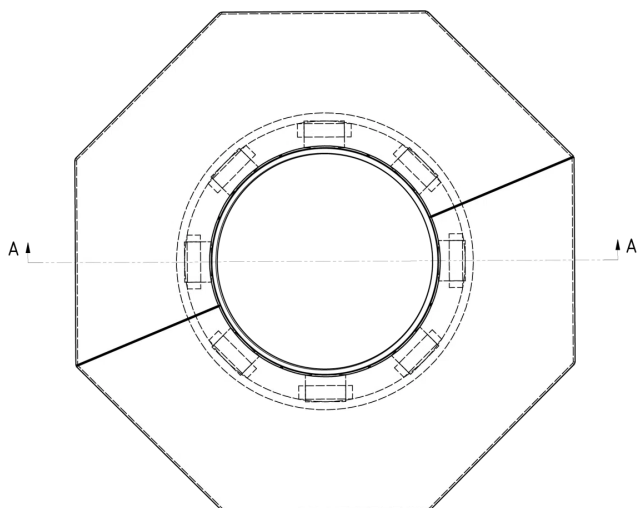



VT-FTPC technical specifications

vt-ftp-technical-specifications.xlsx

Sheet1

Pipe size ØDN	Cushion type	n x A°	Ø Di (+/-2)	Ø Do (+/-2)	H	T	t
100 (115.3)	VT1130	6 × 60°	116	168	180	6	3
125 (139.7)	VT1130	6 × 60°	140	192	180	6	3
150 (168.3)	VT1130	8 × 45°	169	221	180	6	3
175 (193.7)	VT1130	8 × 45°	194	246	180	6	3
200 (219.1)	VT1110	6 × 60°	220	286	200	8	3
250 (273.0)	VT1110	6 × 60°	273	339	200	8	3
300 (323.9)	VT1110	8 × 45°	324	390	200	8	3
350 (355.6)	VT1110	8 × 45°	356	422	200	8	3
400 (406.4)	VT1110	8 × 45°	407	473	200	8	3
450 (457.0)	VT1110	10 × 36°	457	523	200	8	3
500 (508.0)	VT1110	10 × 36°	508	574	200	8	3
600 (610.0)	VT1110	10 × 36°	610	676	200	8	3
700 (711.0)	VT1110	12 × 30°	711	777	200	8	3
800 (813.0)	VT1110	12 × 30°	813	879	200	8	3
900 (914.0)	VT1110	16 × 22.5°	914	980	200	8	3

VIBRATEC

Contact information

Sweden

+46 176207880
info@vibratec.se

Norway

+47 33070750
info@vibratec.no

Denmark

+45 49132244
info@vibratec.dk

Estonia

+372 56627990
info@vibratec.ee

Finland

+35 8402589117
palvelu@3di.fi

India

+91 7755996308
rc@vibratec.in



vibratec.org/linkedin



vibratec.org/youtube



vibratec.org/vimeo