



REGUFOAM Vibration Isolation

REGUFOAM vibration is an elastic polyurethane foam designed for optimal vibration isolation. It is available in twelve different densities and various thicknesses, now including thinner options, offering even more flexibility to suit diverse needs.

REGUFOAM vibration 220plus

Load range up to 0.028 N/mm^2 . Depending on load and material thickness, natural frequencies of 9 Hz can be achieved.

Product Characteristics

Continuous static load

0.028 N/mm^2

Continuous and variable loads/operating load range

0 to 0.04 N/mm^2

Peak loads (rare, short-term loads)

0.9 N/mm^2

Standard forms of delivery, ex warehouse

Rolls

Thickness: 12.5 and 25 mm are standard, and regularly available off the shelf. Special thicknesses on request





Length: 5000 mm, special lengths available on request

Width: 1500 mm

Sheets, strips or pads

On request: Die-cutting, water-jet cutting, self-adhesive versions possible

Technical Specifications

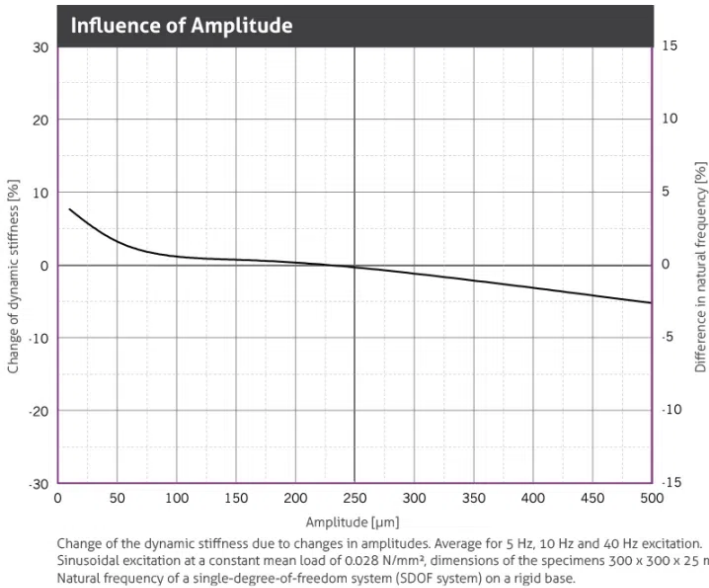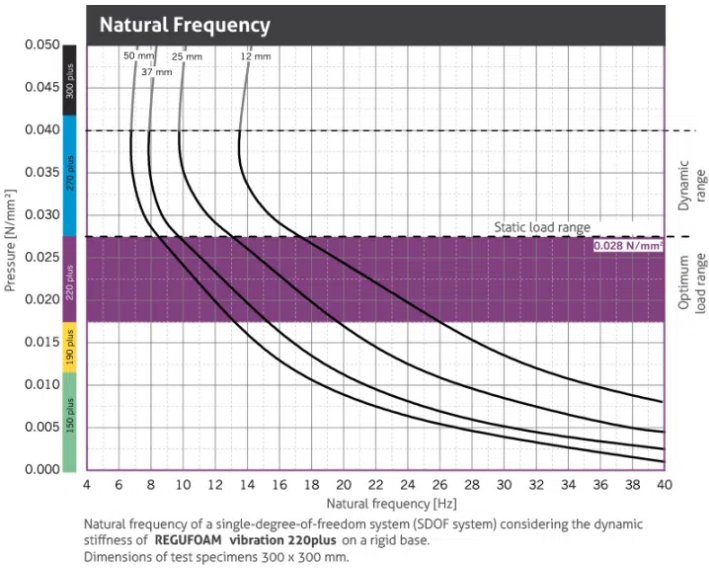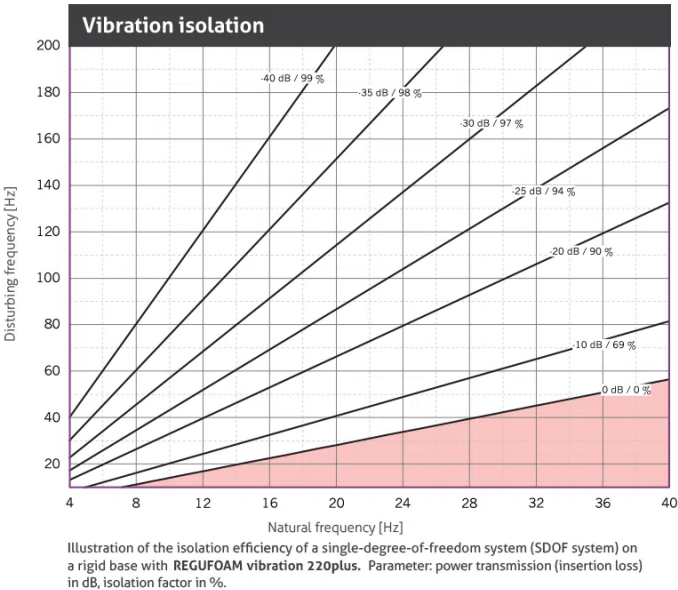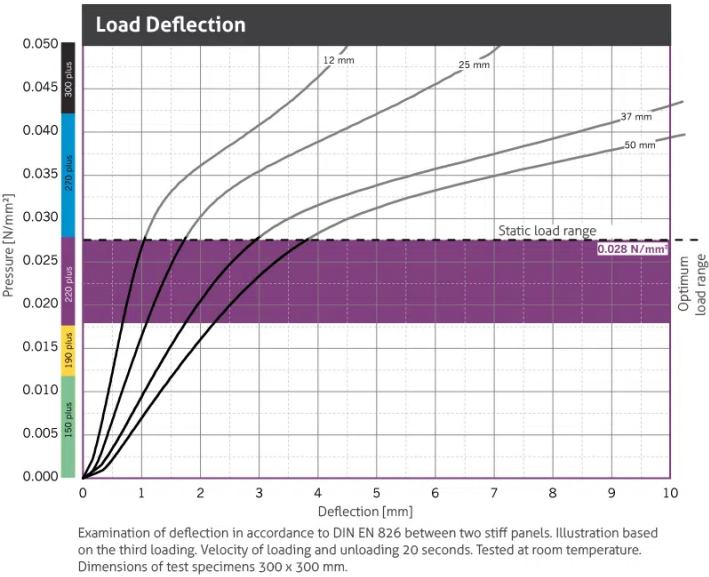

REGUFOAM vibration 220plus

Physical property	Norm	Result	Comment
Static modulus of elasticity	Based on EN 826	0.15 - 0.35 N/mm ²	Tangential modulus, see figure "modulus of elasticity"
Dynamic modulus of elasticity	Based on DIN 53513	0.35 - 0.72 N/mm ²	Depending on frequency, load and thickness, see figure "dynamic stiffness"
Mechanical loss factor	DIN 53513	0.22	Load-, amplitude- and frequency-dependent
Compression set	Based on DIN EN ISO 1856	2.3 %	Measured 30 minutes after decompression with 50 % deformation / 23 °C after 72 hrs
Tensile strength	Based on DIN EN ISO 1798	0.5 N/mm ²	
Elongation at break	Based on DIN EN ISO 1798	180%	
Tear resistance	Based on DIN ISO 34-1	2.1 N/mm	
Fire behaviour	DIN 4102	B2	
	DIN EN 13501-1	E	
Sliding friction	REGUPOL-laboratory	0.7	Steel (dry)
	REGUPOL-laboratory	0.8	Concrete (dry)
Compression hardness	Based on DIN EN ISO 3386-2	39 kPa	Compressive stress at 25 % deformation test specimen h = 25 mm
Rebound elasticity	Based on DIN EN ISO 8307	47%	dependent on thickness, test specimen h = 25 mm
Force reduction	DIN EN 14904	69%	dependent on thickness, test specimen h = 25 mm



Contact information

Sweden	Norway	Denmark	Estonia	Finland	India
+46 176207880 info@vibratec.se	+47 33070750 info@vibratec.no	+45 49132244 info@vibratec.dk	+372 56627990 info@vibratec.ee	+35 8402589117 palvelu@3di.fi	+91 7755996308 rc@vibratec.in

 vibratec.org/linkedin
 vibratec.org/youtube
 vibratec.org/vimeo